

## TECHNICAL DATA SHEET

### NON-CHLORINATED BRAKE & PARTS CLEANER PART NO. 49665

#### PHYSICAL PROPERTIES

Physical State.....	Aerosol liquid
Color/Appearance .....	Clear
Odor .....	Sweet mild solvent odor
Specific Gravity .....	0.8
Boiling/Cond. Point .....	132°F (56°C)
Solubility.....	Insoluble in water
Evaporation Rate.....	>1 (BuAc=1)
V.O.C. % .....	19%
NFPA Flammability Rating .....	4*
*Highly Flammable	

#### DESCRIPTION

*Dynatex® Non-Chlorinated Brake & Parts Cleaner* provides maximum performance in a cleaner without the use of ozone depleters or chlorinated solvents. It penetrates through dirt and corrosion and flushes them away, eliminating the need to disassemble. It leaves no residue and dries fast. Ideal for aluminum surfaces.

#### FEATURES


Powerful formula easily removes:

- Dried brake fluid
- Grease
- Oil
- Dirt
- Dries fast with no residue
- Tested in accordance to 75/324/EEC Directive 6.1

#### TYPICAL APPLICATIONS

All brake systems including:

- Drum(s)
- Calipers
- Discs
- Shoes
- Pads
- Cylinders
- Springs
- And, all purpose parts cleaning

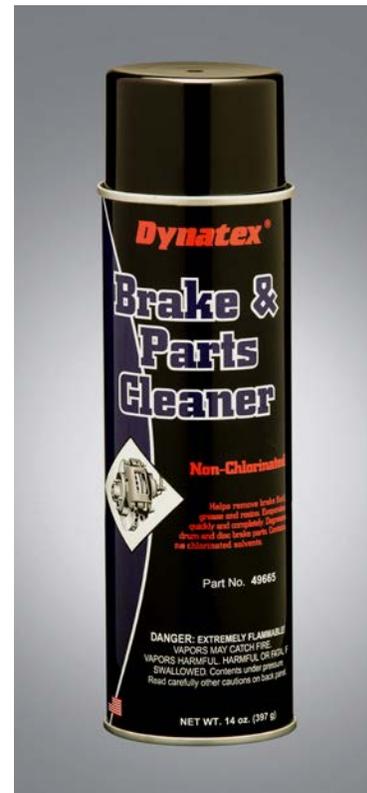

#### DIRECTIONS FOR USE:

1. Do not get product on plastic, rubber, painted, waxed or similar finished surfaces; severe damage may result. Protect these surfaces from over-spray and immediately use water to rinse off any product that might get on them.
2. Lightly wet down all dusts and surfaces to be cleaned by spraying in short bursts from a distance of about 18 to 24 inches.
3. After surfaces have been wetted, continue spraying at a distance of about 12 to 18 inches to flush contaminants from surface.
4. After spraying brake parts thoroughly, allow them to air dry (or wipe with a soft clean cloth). If deposits are heavy, repeat application.

## GENERAL INFORMATION

This product is not recommended for use in pure oxygen environments and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet.

## STORAGE AND SHELF LIFE

*Dynatex® Non-Chlorinated Brake & Parts Cleaner* should ideally be stored in a cool, dry location in unopened containers at a temperature between 46°F (8°C) to 82°F (28°C) unless otherwise labeled. DO NOT store within 1 meter (4 feet) of roofline of the warehouse of storage building. Store in accordance with NFPA 30B for level 3 aerosol. *Dynatex® Non-Chlorinated Brake & Parts Cleaner* has a shelf life of 18 months from date of shipment

Contents under pressure. Do not smoke while using or use near open flame. Container may explode if heated in any manner. Protect from sunlight and do not expose to temperatures exceeding 122°F (50°C). Do not pierce or burn container, even after use. Do not spray on a naked flame and any incandescent material. **DO NOT SMOKE WHILE USING THIS PRODUCT.**

## TRANSPORTATION INFORMATION

### DOT Road Shipment Information

DOT Description ... Consumer Commodity ORM-D  
UN Number .....UN1950  
Hazard Class ..... 2  
Packing Group .....N/A

## USERS PLEASE READ

The information and data contained herein is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of use. Since the supplier cannot know all the uses, or the conditions of use to which these products may be exposed, no warranties concerning the fitness or suitability for a particular use or purpose are made.

It is the user's responsibility to thoroughly test any proposed use of our products and independently conclude satisfactory performance in the application.

Likewise, if the application, product specifications or manner in which our products are used requires government approval or clearance, it is the sole responsibility of the user to obtain sure authorization.

**Non-warranty:** Because the storage, handling and application of the material is beyond Dynatex control, we can accept no liability for the results obtained. Dynatex sole limited warranty is the product meets the manufacturing specifications in effect at time of shipment. There is no warranty of merchantability or fitness for use, nor any other express or implied warranty. Dynatex will not be liable for incidental or consequential damages of any kind. The exclusive remedy for breach of such limited warranty is a refund of purchase price or replacement of any product shown to be other than as warranted.

Suggestions of uses should not be taken as inducements to infringe any patents.

**Dynatex®** A division of Soudal Accumetric

### Dynatex

350 Ring Road  
Elizabethtown  
Kentucky 42701 USA  
(800) 999-2937  
TEL (270) 769-5557  
FAX (270) 769-6418

### Outside U.S.

TEL +1(270) 769-5557  
FAX +1(270) 769-6418

### Accumetric Asia Pacific, LTD

18 Kitpanit Bldg. 5<sup>th</sup> Floor  
#502 Patpong Road  
Suriyawong, Bangrak  
Bangkok, 10500 Thailand  
TEL (662) 634-3060  
FAX (662) 634-3066

Email: sales@dynatexinc.com  
Website: www.dynatexinc.com