


“BLACK /// RAPTOR”
WELDING MASK

TECHNICAL SPECIFICATIONS

Model	LY600A
Filter size	110 x 90 x 9 mm
Viewing Area	92.5 x 42.5 mm
Switching Speed	≤ 3/10000S
Sensibility Adjustment	Continuos control
Light shade	DIN4
Dark shade	DIN 9 - DIN 13
Delay	0.1 - 0.8 S
Power	Solar / Lithium Battery
Power capacity	600mAh
Temperature	-20 °C - +65 °C
Arc Sensors	2
UVB Protection	DIN 16

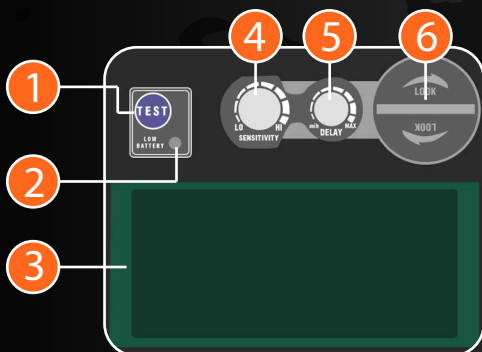

1. Test button ADF
2. Low power alarm
3. LCD Protector
4. Sensibility control knob
5. Delay control knob



SHADE GUIDE

WELDING PROCESS	ARC CURRENT (AMPERAGE)																	
	0.5	2.5	10	20	40	80	125	175	225	275	350	450						
	1	5	15	30	60	100	150	200	250	300	400	500						
SMAW					9	10		11	12		13	14						
MIG (HEAVY)							10	11	12		13	14						
MIG (LIGHT)							10	11	12	13	14	15						
TIG - GTAW				9	10	11	12	13			14							
MAG / CO2					10	11	12	13			14	15						
SAW							10	11	12	13	14	15						
PAC							11	12			13							
PAW				8	9	10	11	12	13		14	15						