



HOSE REEL & CABINETS

SWING HOSE REEL WITH CABINET


ECONOMICAL
SIMPLE & COMPACT
EASY TO INSTALL
STEEL CABINET WITH HOSE REEL
STAINLESS STEEL LOCK
EPOXY POWDER COATED FINISH
ALL METAL COMPONENTS



CAPACITY AND THROW LENGTHS

Pressure at inlet to stop valve, measured with flowing water. Valid for hose reels with max. 30 meter hose.

_____ = 25 mm hose

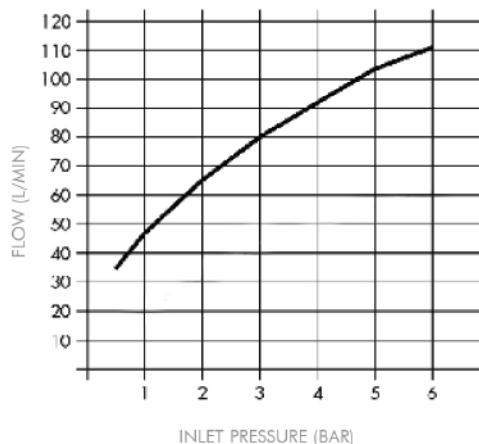

Method of Operation

- Swing out hose reel in the required direction, manually turn on water supply and run out hose.
- Open jet spray nozzle.
- Aim at base of fire.
- Keep hose pressurized when reeling back in.

SPECIFICATIONS		SWING HOSE REEL
HOSE SIZE	1"	
MODEL NUMBER	PT01-06	
HOSE	100 ft. EN694 Black P.V.C.	
NOZZLE	PLASTIC JET/SPRAY	
DRUM DEPTH (IN)	7 1/2"	
DRUM DIAMETER (IN)	21 3/4"	
COMPONENTS	INPUT TUBE - BRASS SPOKE/ROCKER ARM /MOUNTED PARTS/NOZZLE	
WORKING PRESSURE	6 BAR / 85 P.S.I.	
FINISH	RED EPOXY POWDERCOAT	

SPECIFICATIONS		CABINET
DIMENSIONS	29 1/2" x 29 1/2" x 12 1/2"	
LOCK	CHROME ROUND PADDLE	
MOUNTING	RECESSED OR SURFACE	
FINISH	STEEL W/RED POWDER	
	COAT FINISH	
HINGES	PIN TYPE	

APPROVALS: CE, EN671, EN694, ISO 9001



MANUFACTURED TO
EXACTING STANDARDS UNDER



Complies with
BS EN671
BS EN694

DISTRIBUTED BY:

InterChem
Just what you need!

INTERCHEM LIMITED

9th Avenue South,
Barataria, Trinidad.

Tel.: (868) 235-CHEM (2436)
Email: sales@interchem.co.tt

Website: www.interchem.co.tt, www.titan.co.tt